


1. Select DCS/XLX as the Active connector
2. Click "Switch to selected"

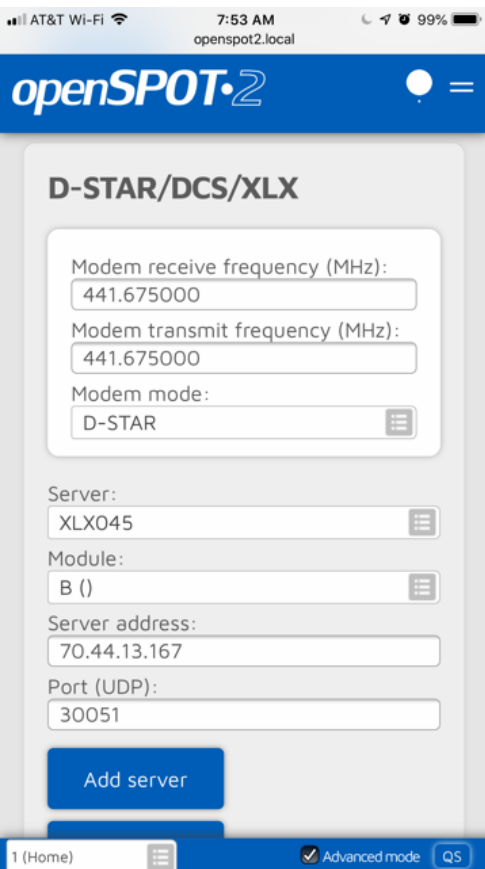

3. Make sure that the frequency is correct
4. Drop down the Server selection field, and choose XLX045
5. Select B Module
6. Proper Server Address and Port should be automatically selected

For PA Cross Mode, use XLX045 Module A
XLX545 Module B

Check D-STAR registration

Local module:

Reflector ID:

Remote module:

RX timeout (sec):

Connect retry interval (sec):

Save

7. Click on Save
8. You should hear "OpenSpot connected to XLX045B"
9. You should now be connected.
10. That's it.